



# EGA

*perfil*

## PROW POST MAGNUM


Maximum benefits in the row  
post market

**AGRICULTURE**  
3.0

AVDA. DE LOS CASTAÑOS, Nº 15 · POL. IND.  
SAN MIGUEL 31132 · VILLATUERTA (NAVARRA)  
T. (+34) 948 32 16 20 F. (+34) 948 32 16 21  
egaperfil@egaperfil.com  
[www.egaperfil.com](http://www.egaperfil.com)

# ROW POST MAGNUM

Maximum benefits in the row post market

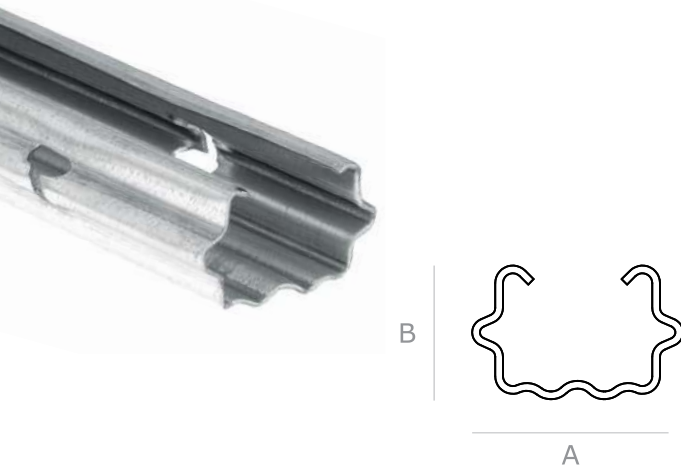

**Standard lengths (mm): 2200 and 2000.**  
**The desired length can be produced on demand.**

## GENERAL SPECIFICATIONS:

Our posts have mix notches (parallel above and alternate below) for greater versatility and resistance.

If it's required we produce different types of notches: parallel, alternate, central drill, horizontal notches (H), automatic revail (RA) or a combination of some of them.

The posts are marked with the year when they are manufactured.

The posts are totally prepared for integrated mechanization (harvest, cutting, etc.) according to the chosen post.

Depending of the type of terrain and instalation, it's advisable to nail between 1/3 or 1/4 of the total length.

According to the especification of the vineyard, the distance between row posts could go from 4 to 6 meters.

## DESCRIPTION

The best technical features for an 60x40 mm intermedium post. Unbeatable robustness and mechanical resistance. Excellent stability and nailing to the floor. Perfect for high production vineyards, windy areas with a big vegetal development and all kinds of grounds.

## QUALITY

**TYPE OF STEEL AND COVERING:** DX51D Steel, Z-275 Galvanized, according to the EN-10346:2015.

Possible to manufactured on demand different covering (Magnelis...) or with other special types of steel as "Corten" or raw steel.

**THICKNESS:** 1,50 / 1,80 mm.

## CROSS SECTION

**A (width) mm.** 60

**B (height) mm.** 40

**Weight per linear meter (kg./ml.):** e= 1,5 mm. / 1,625  
e= 1,8 mm. / 1,950

**Length tolerance (+/- mm):** 3,000

**Section tolerance (+/- mm):** 1,000

**Inertias (e=1,80 mm):** I1 (vertical) mm<sup>4</sup>: 115.207  
I2 (horizontal) mm<sup>4</sup>: 45.126

## DESIGN AND PACKAGING

**Type of notch:** Notch N and on demand H and RA.

**Quantity of notches per length:**

Length (mm)	Units
2000	12
2200	12
<b>Units per package:</b>	150 uts.
<b>Units per full truck</b>	

Length (mm)	Units	e=1,50 mm.
1800	8400	
2000	7650	
2200	6900	
2500	6150	